

02/11/99  
Jc618 U.S. PTO

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1046.1196/JDH

First Named Inventor or Application Identifier:

Ichiro NAKANO, et al.

Express Mail Label No.

Jc135 U.S. PTO  
09/248111  
02/11/99

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents**  
**Box Patent Application**  
**Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract ..... [ Total Pages: 34 ]
3. ☒ Drawing(s) (35 USC 113) ..... [ Total Sheets: 7 ]
4. ☒ Oath or Declaration ..... [ Total Pages: 3 ]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

**17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:**
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:        /       
**18. CORRESPONDENCE ADDRESS**

STAAS & HALSEY  
Attn: James D. Halsey, Jr.  
700 Eleventh Street, N.W., Suite 500  
Washington, DC 20001

Telephone: (202) 434-1500  
Facsimile: (202) 434-1501

MOVING IMAGE DATA CONTROLLING APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a moving image  
5 data controlling apparatus and a method thereof,  
particularly, to an apparatus for recording and  
reproducing a digital moving image and a method thereof.  
More particularly, the present invention relates to a  
technique applying a display effect such as displaying  
10 in mosaic and making shadings to a specific area in an  
image when a personal computer or the like displays a  
digital moving image.

2. Description of the Related Art

As a conventional technique, it is known that, when  
15 display of an image is changed such as scrambling in  
shadings or in mosaic, pixel data is corrected while  
image source is digitized and is encoded into a digital  
image.

In the above-described technique, it is necessary  
20 to change data for each of pixels constituting the  
image, therefore, there is a trouble, namely, it needs a  
complicated procedure. Further, a pixel value is changed  
once, therefore, it is impossible to make the display  
effect effective or ineffective according to an

instruction and a password input from an user, and so on.

### SUMMARY OF THE INVENTION

It is an object of the present invention to provide  
5 a technique applying a display effect such as shadings  
and mosaic to a digital moving image, and to provide a  
technique capable of dynamically making the display  
effect effective or ineffective at real time according  
to an input from an user.

10 The present invention introduces the followings in  
order to achieve the above-described objects.

That is, the present invention introduces a moving  
image data controlling apparatus comprising a moving  
image source input unit for inputting moving image data;  
15 an information input unit for inputting control  
information designating a processing for the moving  
image data inputted through said moving image source  
input unit; and a data integrating unit for integrating  
the moving image data inputted through said moving image  
20 source input unit with the control information inputted  
through said information input unit.

More concretely, a moving image data controlling  
apparatus comprises a digital moving image source input  
unit for inputting digital moving image data containing

plural data of a predetermined image unit; an area  
information input unit for inputting area information  
defined for each predetermined image unit of the digital  
moving image data inputted through said moving image  
5 source input unit; and a data integrating unit for  
integrating the area information inputted through said  
area information input unit, as additional information  
for all pixels in each predetermined image unit of the  
digital moving image data inputted through said digital  
10 moving image source input unit, with the digital moving  
image data.

The present invention also introduces a moving  
image data storing method comprising: a step of  
inputting moving image data; a step of inputting control  
15 information designating a processing for the inputted  
moving image data; a step of integrating the inputted  
moving image data with the control information; and a  
step of storing the moving image data and the control  
information which are integrated.

20 The present invention also introduces a computer  
readable medium storing a program making computer  
function as a moving image source input unit for  
inputting moving image data; an information input unit  
for inputting control information designating a

processing for the moving image data inputted through  
said moving image source input unit; and a data  
integrating unit for integrating the moving image data  
inputted through said moving image source input unit  
5 with the control information inputted through said  
information input unit.

Further, the present invention introduces a moving  
image data controlling apparatus comprising a moving  
image source input unit for inputting moving image data;  
10 an information input unit for inputting control  
information designating a processing for the moving  
image data inputted through said moving image source  
input unit; and a data changing unit for executing data  
change designated by the control information to a moving  
15 image data stream obtained from the moving image source  
input unit.

In this case, the data changing unit may execute  
the data change while said moving image data stream is  
reproduced.

20 The moving image data controlling apparatus may  
further comprise an instructing unit for instructing the  
data changing unit whether or not the data change is  
executed and/or how to change data when the data change  
is executed in accordance with an input from an user or

from another event.

The present invention also introduces a moving image data reproducing method comprising a step of inputting moving image data; a step of inputting control information designating a processing for the moving image data; and a step of executing the processing designated by the control information to a moving image data stream obtained from the inputted moving image data.

10 In this case, the data change may be executed while said moving image data stream is reproduced.

An instruction from an user or another event may be inputted, and an existence of the data change and/or a change content may be decided in accordance with the inputted instruction or the inputted event.

15 The present invention also introduces a computer readable medium storing a program making computer function as; a moving image source input unit for inputting moving image data; an information input unit for inputting control information designating a processing for the moving image data inputted through the moving image source input unit; and a data changing unit for executing data change designated by the control information to a moving image data stream obtained from

the moving image source input unit.

5 The present invention also introduces a moving  
image data controlling apparatus comprising: a digital  
moving image source input unit for inputting digital  
moving image data containing plural data of a  
predetermined image unit; an area information input unit  
for inputting area information defined for each  
predetermined image unit of the digital moving image  
data inputted through said moving image source input  
10 unit; and a data changing unit for obtaining a digital  
moving image stream from the moving image source input  
unit and for executing data change to pixels of the  
digital moving image data designated by the control  
information in each predetermined image unit of the  
15 digital moving image stream.

In this case, the moving image data controlling  
apparatus may further comprise an instructing unit for  
instructing the data changing unit whether or not a  
pixel value is changed and/or how to change the pixel  
20 value when the pixel value is changed.

The present invention introduces a moving image  
data controlling method comprising: a step of inputting  
digital moving image data containing plural data of a  
predetermined image unit; a step of inputting area

information defined for each predetermined image unit of the inputted digital moving image data; a step of obtaining a digital moving image stream from the digital moving image data; and a step of executing data change to pixels of the digital moving image data designated by the control information in each predetermined image unit of the digital moving image stream.

In this method, it may be instructed whether or not a pixel value is changed and/or how to change the pixel value when the pixel value is changed.

The present invention also introduces a computer readable medium storing a program making computer function as; a digital moving image source input unit for inputting digital moving image data containing plural data of a predetermined image unit; an area information input unit for inputting area information defined for each predetermined image unit of the digital moving image data inputted through the moving image source input unit; and a data changing unit for obtaining a digital moving image stream from the moving image source input unit and for executing data change to a pixel of the digital moving image data designated by the control information in each predetermined image unit of the digital moving image stream.



BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the present invention will become apparent during the following discussion conjunction with the accompanying drawings,  
5 in which:

FIG. 1 is a block diagram showing an encoder according to an embodiment of the present invention;

FIG. 2 is a block diagram showing an decoder according to an embodiment of the present invention;

10 FIG. 3 is a block diagram showing a decoder according to another embodiment;

FIG. 4 is a view showing a concrete example of an encoder;

15 FIG. 5 is a view showing a concrete example of a decoder;

FIG. 6 is a view showing another concrete example of a decoder;

FIG. 7 is a view showing an user graphical interface of an instructing unit;

20 FIG. 8 is a flowchart showing a process according to an embodiment; and

FIG. 9 is a view showing a sample of a bitmap.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Hereinafter, concrete explanations will be given of embodiments according to the present invention.

<Embodiments>

FIG. 1 shows an encoder according to an embodiment  
5 of the present invention.

As shown in FIG. 1, an encoder 10 for a moving image is provided with a digital moving image source input unit 11, an area information input unit 12, an additional information encoding unit 13, a digital  
10 moving image stream encoding unit 14 and a multiplexing unit 15.

The digital moving image source input unit 11 receives digital moving image data containing moving image units of data. Concretely, the digital moving  
15 image source input unit 11 receives digital data containing frames as predetermined image units.

The area information input unit 12 receives area information defined for each predetermined image unit of the inputted digital moving image. Concretely, the area  
20 information input unit 12 receives the area information corresponding to each frame of the digital moving image.

The additional information encoding unit 13 encodes the area information inputted through the area information input unit 12 as additional information for

all pixels in each predetermined image unit of the digital moving image source inputted through the digital moving image source input unit 11.

5 The moving image encoding unit 14 encodes digital moving image stream according to the digital moving image data inputted through the digital moving image source input unit 11.

10 Concretely, a plurality of digital moving image frames formed as time passes are inputted through the digital moving image source input unit 11, and the moving image encoding unit 14 encodes these digital moving image frames into a digital moving format such as MPEG-1 Video.

15 The multiplexing unit 15 synchronizes and multiplexes the additional information with each predetermined fixed image unit of the digital moving image stream based on both outputs from the additional information encoding unit 13 and the moving image encoding unit 14, and outputs them as one piece of data.

20 The area information, for example, is data obtained by sequentially arranging bit maps as time passes, in which 1 bit is allocated to each pixel of the frame and which has an image size equal to the frame size of the digital moving image. The area information is compressed

in a format such as RLE (run-length encode format) and is encoded by the additional information encoding unit 13.

FIG. 2 shows a decoder used in order to display the moving image data encoded by the encoder 10 shown in FIG. 1, the moving image data having additional information for each pixel.

The encoder 20 is provided with a demultiplexing unit 21, an additional information decoding unit 22, a moving image decoding unit 23 and a data changing unit 24.

The demultiplexing unit 21 demultiplexes the multiplexed digital moving image data so as to obtain an encoded additional information and an encoded digital moving image stream data. In other words, the demultiplexing unit 21 separates data encoded by the encoder 10 shown in FIG. 1 into an encoded additional information stream and an encoded digital moving image stream.

The additional information decoding unit 22 decodes the encoded additional information. Concretely, the additional information decoding unit 22 outputs area data for each frame of the digital moving image stream.

The moving image decoding unit 23 decodes the

encoded digital moving image stream data, and outputs each frame of the digital moving image.

The data changing unit 24 receives the additional information outputted from the additional information decoding unit 22 and the digital moving image stream  
5 outputted from the moving image decoding unit 23, and changes data for a pixel of the digital moving data designated by the area information in each predetermined moving image unit of this digital moving image stream.  
10 Concretely, the data changing unit 24 obtains frame data outputted from the digital moving stream decoding unit 23 and area data outputted from the additional information decoding unit 22 corresponding to this frame data, and changes a pixel value of the corresponding  
15 area in the frame designated by the additional information.

The frame data outputted from the data changing unit 24 is outputted into a display memory such as VRAM at a constant rate as time passes. In this way, a pixel  
20 value of a specified area in an digital moving image is changed, and outputted.

As shown in FIG. 3, an encoder may be provided with an instructing unit 25 instructing the data changing unit 24 at real time whether or not a pixel value is

changed in accordance with an input from an user or from another event and/or how the pixel value is changed when the pixel value is changed.

In other words, the instructing unit 25 detects an  
5 user input or an event, and sends a signal instructing the data changing unit 24 how to change data when data is really changed in accordance with the detected user input or event.

Next, explanations will be given of operation of  
10 the encoder 10 and the decoder 20.

In FIG. 1, the digital moving image source input unit 11 receives digital moving image data consisting of predetermined units of data, such as frames and pictures.

15 The area information input unit 12 receives the area information defined for each predetermined image unit of the inputted digital moving image. This is separately carried out regardless of before and after inputting digital moving image source.

20 In other words, area information is defined in correspondence with the predetermined image unit (such as frame), and is inputted.

Then, the additional information encoding unit 13 encodes area information inputted through the area

information input unit 12 into additional information for all pixels of each predetermined image unit in the digital moving image source inputted through the digital moving image source input unit 11.

5           The moving image encoding unit 14 encodes the digital moving image stream according to the digital moving image data inputted through the digital moving image source input unit 11.

10           The multiplexing unit 15 multiplexes both outputs from the additional information encoding unit 13 and the moving image encoding unit 14 so as to output one by synchronizing the additional information with each predetermined image unit of the digital moving image stream.

15           With this procedure, encoding of the moving image is finished.

20           When the moving image encoded in the above-described procedure is reproduced, the moving image data having additional information every encoded pixel is displayed.

          In FIG. 2, the demultiplexing unit 21 demultiplexes the multiplexed digital moving image data, and obtains the encoded additional information and the encoded digital moving image stream data.

Then, the additional information decoding unit 22 decodes the encoded additional information. The moving image decoding unit 23 decodes the encoded digital moving image stream data.

5       As a result, the data changing unit 24 obtains the area information outputted from the additional information decoding unit 22 and the digital moving image stream outputted from the moving image decoding unit 23, and changes data for a pixel of the digital  
10   moving image designated by the area information in each predetermined image unit of this digital moving image stream.

      In this way, the held digital moving image data is not changed, but digital moving image data for display  
15   is changed in the display step after decoding.

      As shown in FIG. 3, the instructing unit 25 controls the data changing unit 24. In other words, the instructing unit 25 instructs the data changing unit 24 at real time whether or not the pixel value is changed  
20   in accordance with an input from the user or another event and/or how to change the pixel value when the pixel value is changed.

Accordingly, it is possible to determine whether or not the pixel value is changed, and it is possible to easily



obtain the original data which is not changed.

<Concrete examples>

Concrete explanations will be given of the above-described embodiments.

5        FIG. 4 is a view showing a concrete example of an encoder.

A digital moving image encoder 30 is enclosed by a broken line, and is carried out by software executed in personal computer.

10        The digital moving encoder 30 is connected with a hard disk 36 storing pre-produced digital moving data 38 and mask data 37 produced in correspondence with each frame of this digital moving image.

         This mask data 37 consists of mask frames  
15        corresponding to respective frames of the digital moving data, has an image size (height and width) of each mask frame equal to that of a digital moving image frame, and is provided with a capacity, namely, 1 bit, for each pixel of the digital moving image. The area information  
20        input unit 12 is carried out by reading a file stored in the hard disk onto a memory by a software command, and obtains the mask data 37 as area information. The digital moving image source input unit 11 is carried out by reading a file stored in the hard disk 36 onto a

memory by a software command, and obtains the digital  
moving data 38. Then, the mask data 37 is sent from the  
area information input unit 12 to the additional  
information encoding unit 13 via the memory as the  
5 additional information, and is compressed for each  
frame.

The additional information encoding unit 13 in FIG.  
1 corresponds to a RLE encoding unit 33 in FIG. 4, which  
executes the RLE compression with a software algorithm.  
10 The moving image encoding unit 14 in FIG. 1 corresponds  
to the MPEG-1 Video encoding unit 34 in FIG. 4, which  
executes the MPEG-1 Video encoding by the software  
algorithm. The digital image data 38 is sent from the  
digital moving image source input unit 11 to the  
15 encoding unit 34 via the memory, and is compressed in  
the MPEG-1 Video format.

The multiplexing unit 15 receives the RLE-  
compressed mask data outputted from the RLE encoding  
unit 33 and the data compressed in the MPEG-1 Video  
20 format and outputted from the MPEG-1 Video encoding unit  
34, and multiplexes both data by a software algorithm.

FIG. 5 shows concrete example of a decoder.

As shown in FIG. 5 a decoder 40 surrounded with a  
broken line is carried out with software executed in

personal computer.

The digital moving image decoder 40 is connected with a hard disk 46 storing the digital moving image data produced by the encoder 30 shown in FIG. 4.

5       The demultiplexing unit 21 separates the digital image data inputted from the hard disk 46 to the decoder 40 into the RLE-compressed additional information and image data in the MPEG-1 Video format, and sends them to the RLE decoding unit 42 and the MPEG-1 Video decoding  
10       unit 43, respectively.

The RLE decoding unit 42 decodes the additional information so as to produce a mask data 47, and the MPEG-1 Video decoding unit 43 decodes the image data so as to produce a digital data 48 for display.

15       The data changing unit 24 receives the mask data 47 and the digital moving image data 48, applies a predetermined conversion to a pixel value designated by the mask data 47, and outputs an image of the converted digital moving image to a drawing device. In this way,  
20       an image effect such as "mosaic" is generated at a predetermined area in the digital moving image. Pixel values may be changed so as to generate "mosaic" or another image effect. For example, a pixel value of a specific area may be changed so as to generate a status

like radiating a reflected light.

Next, an explanation will be given of an decoder of another embodiment with reference to FIG. 6.

As shown in FIG. 6, a digital moving image decoder  
5 50 surrounded with a broken line is carried out by a software executed in personal computer.

In FIG. 6, the decoder 50 is similar with the decoder 40 in FIG. 5 expect a data changing unit 44 and an instructing unit 45, therefore, the same numerals are  
10 given to other units in the decoder 50 and no explanation is given thereof.

The instructing unit 45 accepts an input from an user's mouse, and instructs the data changing unit 44 how to change the specified pixel value with the  
15 additional information in the frame data of the moving image.

More detailed explanations will be given with reference to FIG. 7.

FIG. 7 shows a graphical user interface of the  
20 instructing unit 45 in FIG. 6, which is a dialog box displayed on a screen.

As shown in FIG. 7, the instructing unit 45 consists of graphical buttons 61, 62, 63. These buttons 61, 62, 63 can be selected by clicking the mouse or the

like. The instructing unit 45 keeps a variable "n" inside, and the variable becomes "n=1" when the button "no mosaic" 61 is clicked, the variable becomes "n=4" when the button "4 dots mosaic" 62 is clicked, and the variable becomes "n=8" when the button "8 dots mosaic" 62 is clicked.

This variable "n" is sent to the data changing unit 44 shown in FIG. 6.

Next, explanations will be given of an action of the data changing unit 24 shown in FIGs. 5 and 6 with reference to a flowchart shown FIG. 8.

This flowchart shows an algorithm applying an image effect "4x4 dot mosaic" to a pixel of the digital moving image corresponding to the dot of the mask data when the value of the mask data is 1.

In FIG. 8, one pixel of the digital moving image data to be displayed is obtained in the step 101. Subsequently, in the step 102, the mask data corresponding to the pixel obtained in the step 101 is obtained. Then, in step 103, a value of the mask data obtained in the step 102 is checked, and the pixel value of the digital image data to be displayed is changed when the value of the mask data is 1. In the step 103, when the value of the mask data is not 1, the process is

advanced to the step 107 and digital image data is  
outputted without changing the pixel value of the  
digital image data. In the steps 104, 105 and 106, the  
pixel value is processed, namely, when the image is  
5 divided into 4x4 dot tiles, the pixel value is changed  
for a pixel value at an upper left pixel in the same  
tile. In other words, in step 104, the row address of  
the current pixel is divided by n, an integer is picked  
up, and a value X is obtained by multiplying this  
10 integer by n. Subsequently, in the step 105, the column  
address of the current pixel is divided by n, an integer  
is picked up, and a value Y is obtained by multiplying  
this integer by n. Finally, the current pixel value is  
changed for the pixel value of the row address X and the  
15 column address Y, and the changed pixel value is  
outputted. In this way, the image effect "mosaic" can be  
applied only to the image at the area designated by mask  
data.

It is also possible to display another image effect  
20 such as shadings by changing the process in the steps  
104, 105 and 106 into another process with the buttons  
61, 62 and 63 shown in FIG. 7.

As to an algorithm carrying out "shadings", for  
example, it is possible to use a method in which an

arithmetic processing is performed between a value of a pixel and eight values of pixels surrounding the pixel, and a new pixel value is calculated.

An example will be explained of a method of calculating each pixel value in this case. Each pixel in a bitmap of image data includes color information and brightness information, and visibility of the whole image can be changed by changing each brightness information. The display effect "shadings" can be obtained by decreasing the visibility.

For example, FIG. 9 shows a part of one bitmap, including pixels P00, P10, P20, P01, P11, P21, P02, P12, P22. In this case, it is assumed that brightness information of each pixel is shown by PI00, PI10 ... PI22 and each pixel value after applying "shadings" process is shown by PI'00, PI'10, ... PI'22.

Brightness information PI'11 after applying the "shadings" process to the pixel P11 can be calculated with the following formula;

$$PI'11 = (PI00 + PI10 + PI20 + PI01 + 3 \times PI11 + PI21 + PI02 + PI12 + PI22) / 11.$$

This calculation is carried out for original brightness information of all pixels, and the original brightness information is changed for the obtained

brightness information, thereby obtaining "shadings" effect.

Incidentally, there is a case in that some of pixels for this calculation can not be obtained at the image data periphery. In this case, a term corresponding to lack pixel datum is excluded, and new brightness information is calculated by using a formula in which the value 11 of denominator is changed for a value obtained by subtracting a number of lacking pixels from the value 11.

For example, when pixels P00, P10, P20 can not obtained, the formula is changed as follows;

$$PI'11 = (PI01 + 3 \times PI11 + PI21 + PI02 + PI12 + PI22) / 8.$$

When P00, P10, P20, P01, P02 can not obtained, the formula is changed as follows;

$$PI'11 = (3 \times PI11 + PI21 + PI12 + PI22) / 6.$$

FIG. 7 shows a flowchart of the action of the data changing unit 24 and 44 in FIGs. 5 and 6 respectively, and the algorithm of this flowchart shows that, when the value of the mask data is "1", the "mosaic" image effect of  $n \times n$  dot roughness is applied to pixels in the digital moving image corresponding to dots of this mask data. In this way, a user can watch (display) a specific area of the reproduced digital moving image in an original form,



in detailed mosaic or in rough mosaic. Then, in FIG. 6, the instructing unit 45 can switch an existence of change such as "mosaic" at real time.

As above described, in this embodiment, as to a specific area in a digital moving image, pixel data of the digital moving image outputted for display is changed without directly changing pixel data of an original digital moving image, therefore, it is possible to add display effects such as shadings or mosaic easily. An user can also dynamically switch execution/non-execution of the above-described display effects at real time. In other words, it is possible to change a display situation and a screen effect in accordance with an instruction of a user, and it is possible to apply these embodiments to any case, i.e. it is possible to usually display an image harmful to a young person uncleanly and to display the image clearly when a password is inputted.

This invention being thus described, it will be obvious that same may be varied in various ways. Such variations are not to be regarded as departure from the spirit and scope of the invention, and all such modifications would be obvious for one skilled in the art intended to be included within the scope of the

following claims.

[illegible]

What is claimed is:

1. A moving image data controlling apparatus  
comprising:

moving image source input unit for inputting moving  
5 image data;

information input unit for inputting control  
information designating a processing for the moving  
image data inputted through said moving image source  
input unit; and

10 data integrating unit for integrating the moving  
image data inputted through said moving image source  
input unit with the control information inputted through  
said information input unit.

2. A moving image data controlling apparatus  
15 comprising:

digital moving image source input unit for  
inputting digital moving image data containing plural  
data of a predetermined image unit;

area information input unit for inputting area  
20 information defined for each predetermined image unit of  
the digital moving image data inputted through said  
moving image source input unit; and

data integrating means for integrating the area  
information inputted through said area information input  
unit, as additional information for all pixels in each  
predetermined image unit of the digital moving image  
5 data inputted through said digital moving image source  
input unit, with the digital moving image data.

3. A moving image data storing method comprising:  
a step of inputting moving image data;  
a step of inputting control information designating  
10 a processing for the inputted moving image data;  
a step of integrating the inputted moving image  
data with the control information; and  
a step of storing the moving image data and the  
control information which are integrated.

15

4. A computer readable medium storing a program  
making computer function as;  
moving image source input step for inputting moving  
image data;  
20 information input step for inputting control  
information designating a processing for the moving  
image data inputted through said moving image source  
input step; and

data integrating step for integrating the moving image data inputted through said moving image source input step with the control information inputted through said information input step.

5           5. A moving image data controlling apparatus comprising:

          moving image source input unit for inputting moving image data;

          information input unit for inputting control  
10   information designating a processing for the moving image data inputted through said moving image source input unit; and

          data changing unit for executing data change  
          designated by the control information to a moving image  
15   data stream obtained from the moving image source input unit.

          6. A moving image data controlling apparatus  
          according to Claim 5, wherein said data changing unit  
          executes the data change while said moving image data  
20   stream is reproduced.

7. A moving image data controlling apparatus  
according to Claim 5, further comprising:

instructing unit for instructing said data changing  
unit whether or not the data change is executed and/or  
5 how to change data when the data change is executed in  
accordance with an input from an user or from another  
event.

8. A moving image data reproducing method  
comprising:

10 a step of inputting moving image data;  
a step of inputting control information designating  
a processing for the moving image data; and  
a step of executing the processing designated by  
the control information to a moving image data stream  
15 obtained from the inputted moving image data.

9. A moving image data reproducing method according  
to Claim 8, wherein the data change is executed while  
said moving image data stream is reproduced.

10. A moving image data reproducing method  
20 according to Claim 8, wherein an instruction from an  
user or another event is inputted, and an existence of

the data change and/or a change content are decided in accordance with the inputted instruction or the inputted event.

11. A computer readable medium storing a program  
5 making computer function as;  
moving image source input step for inputting moving  
image data;  
information input step for inputting control  
information designating a processing for the moving  
10 image data inputted through said moving image source  
input step; and  
data changing step for executing data change  
designated by the control information to a moving image  
data stream obtained from the moving image source input  
15 step.

12. A moving image data controlling apparatus  
comprising:  
digital moving image source input unit for  
20 inputting digital moving image data containing plural  
data of a predetermined image unit;  
area information input unit for inputting area  
information defined for each predetermined image unit of

the digital moving image data inputted through said  
moving image source input unit; and

data changing unit for obtaining a digital moving  
image stream from the moving image source input unit and  
5 for executing data change to pixels of the digital  
moving image data designated by the control information  
in each predetermined image unit of the digital moving  
image stream.

13. A moving image data controlling apparatus  
10 according to Claim 12, further comprising:

instructing unit for instructing said data changing  
unit whether or not a pixel value is changed and/or how  
to change the pixel value when the pixel value is  
changed.

15 14. A moving image data controlling method  
comprising:

a step of inputting digital moving image data  
containing plural data of a predetermined image unit;

a step of inputting area information defined for  
20 each predetermined image unit of the inputted digital  
moving image data;

a step of obtaining a digital moving image stream



from the digital moving image data; and

a step of executing data change to pixels of the digital moving image data designated by the control information in each predetermined image unit of the digital moving image stream.

15. A moving image data controlling method according to Claim 14, wherein it is instructed whether or not a pixel value is changed and/or how to change the pixel value when the pixel value is changed.

10 16. A computer readable medium storing a program making computer function as;

digital moving image source input step for inputting digital moving image data containing plural data of a predetermined image unit;

15 area information input step for inputting area information defined for each predetermined image unit of the digital moving image data inputted through said moving image source input step; and

data changing step for obtaining a digital moving image stream from the moving image source input step and for executing data change to a pixel of the digital moving image data designated by the control information

in each predetermined image unit of the digital moving image stream.

ABSTRACT OF THE DISCLOSURE

The present invention introduces a technique capable of adding display effects such as shadings and mosaic to a digital moving image easily. First, digital moving image data containing frames and area information defined for each frame are respectively encoded, and the area information is synchronized and multiplexed with each frame of the digital moving image stream so as to be outputted as one data. In reproducing the moving image encoded in this way, each data is demultiplexed, and the area information and the digital moving image stream are decoded by the decoding unit. Then, as to the finally-obtained digital moving image stream for display, the data changing unit executes data change to pixels at specific part of the frame designated by the area information, thereby so-called mosaic or the like is applied to the digital moving image data.

FIG. 1

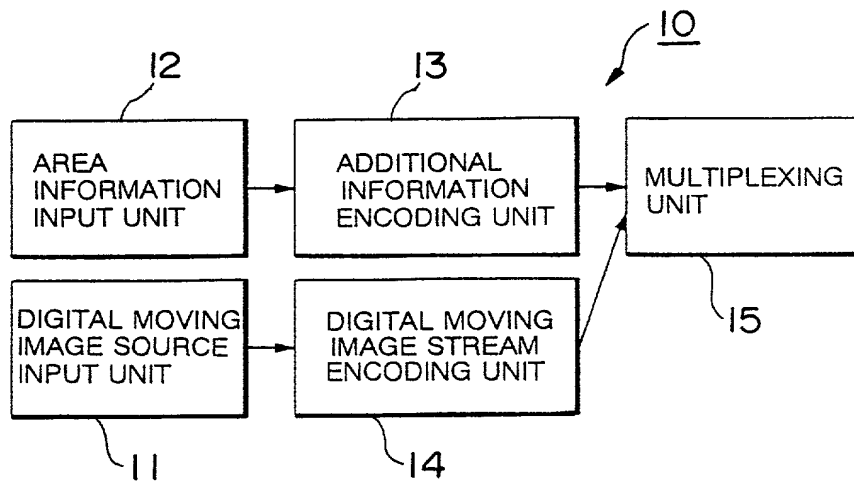


FIG. 2

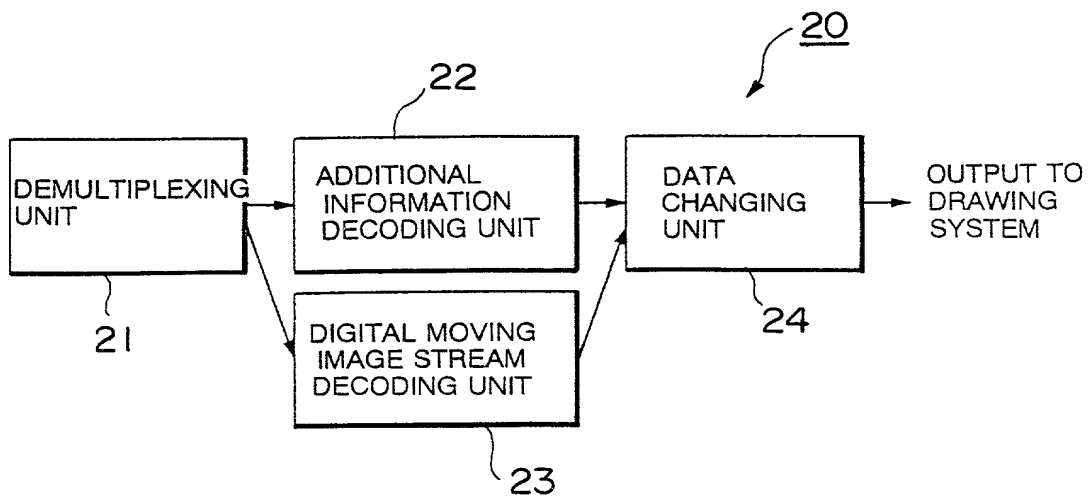


FIG. 3

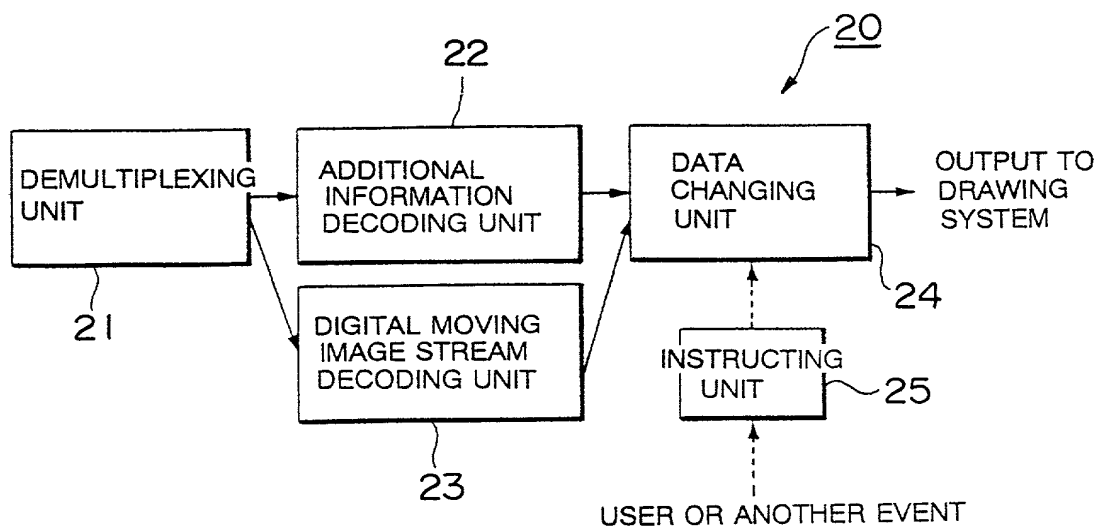


FIG. 4

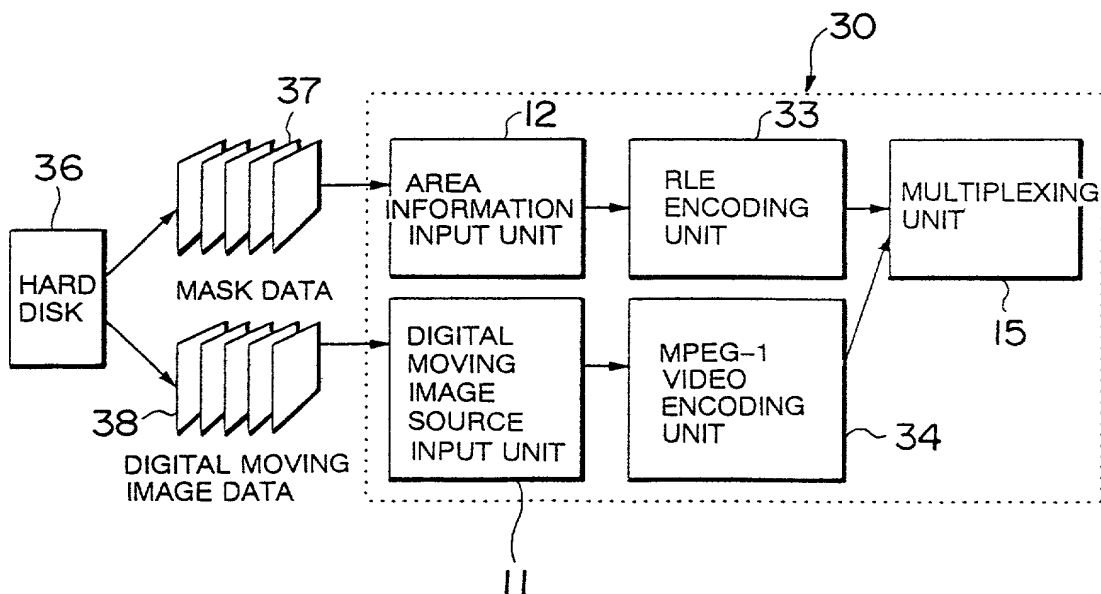


FIG. 5

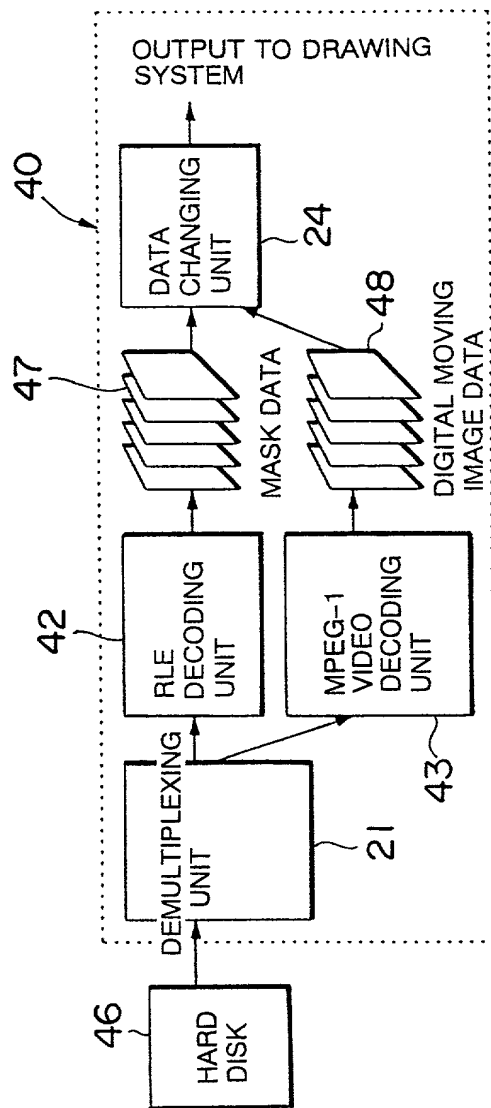


FIG. 6

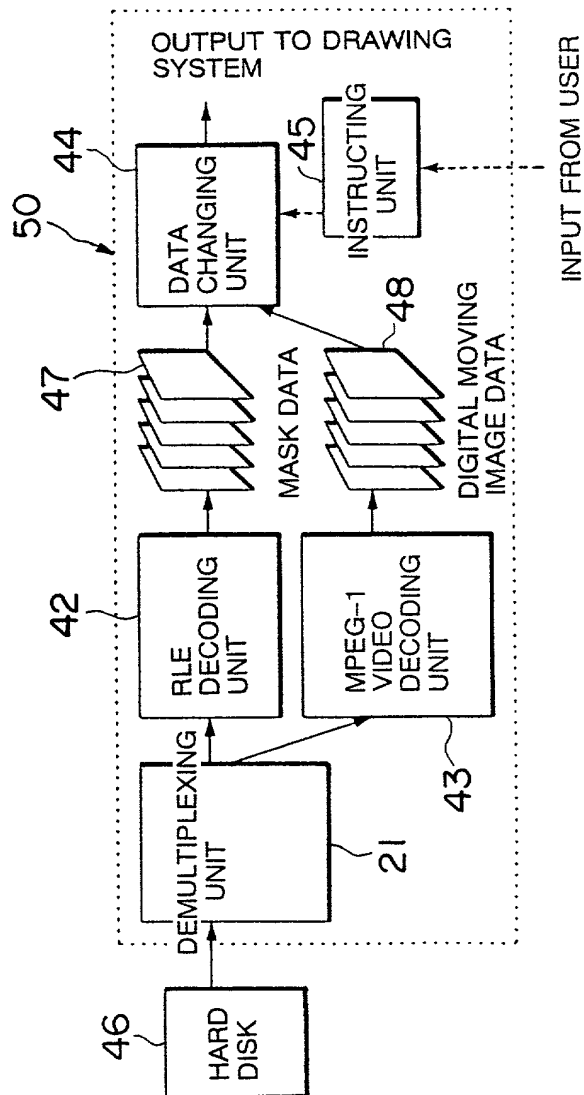


FIG. 7

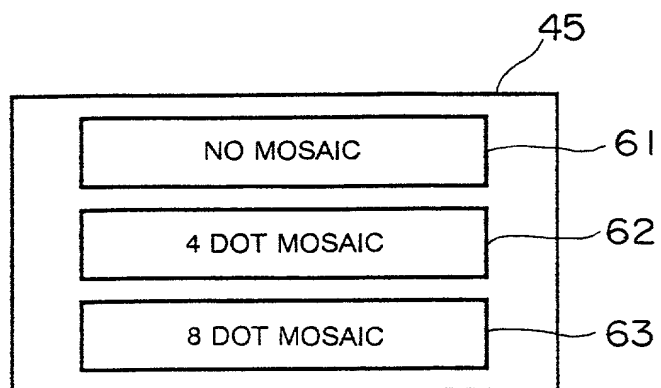




FIG. 8

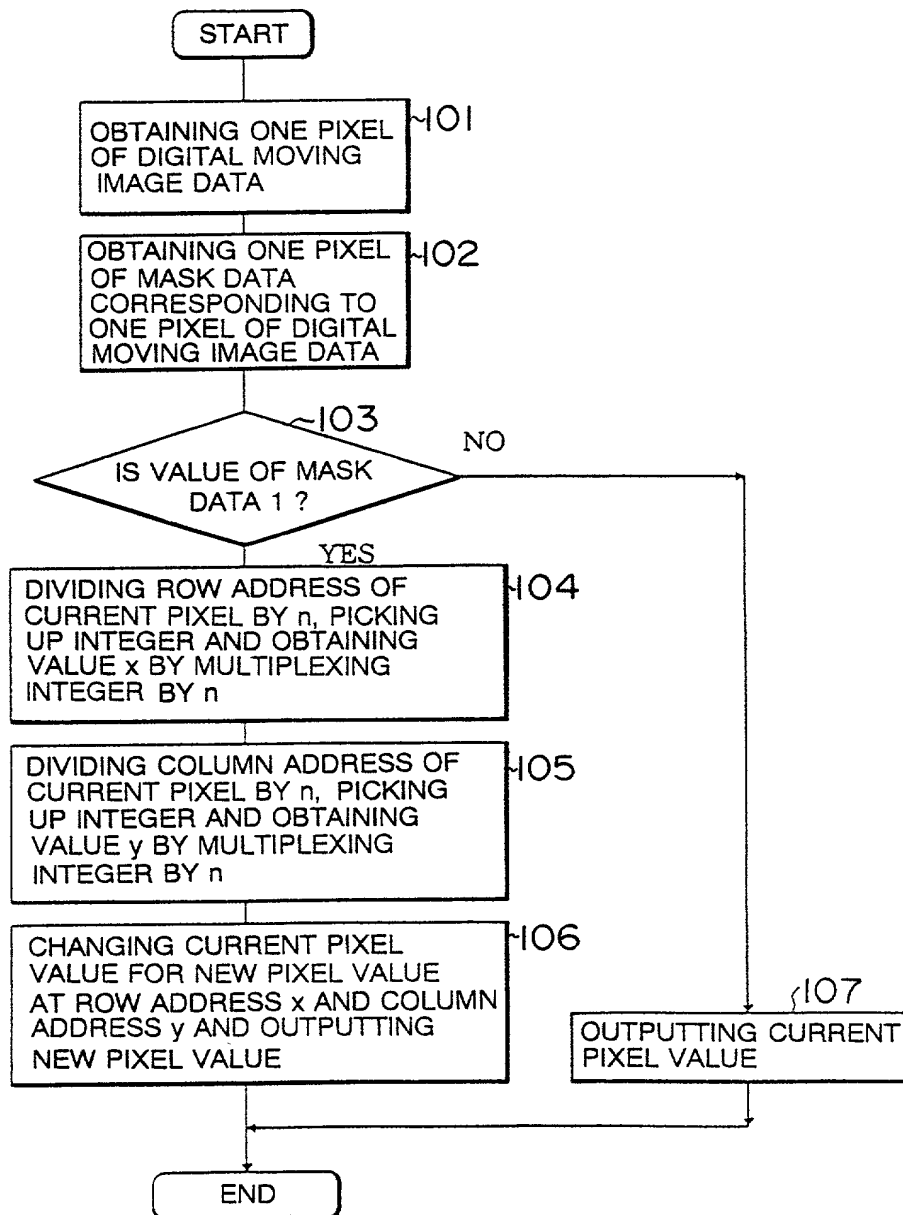


FIG. 9

P 0 0	P 1 0	P 2 0
P 0 1	P 1 1	P 2 1
P 0 2	P 1 2	P 2 2

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

" MOVING IMAGE DATA CONTROLLING

APPARATUS AND METHOD "

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条5.6項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願  
10-185377

Japan

(Number)  
(番号)

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed  
優先権主張なし

30/06/1998

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# Japanese Language Declaration

## (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許審判局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY  
700 Eleventh Street, N.W.  
Suite 500  
Washington, D.C. 20001

直接電話連絡先 (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY  
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor		
	Ichiro NAKANO		
発明者の署名	日付	Inventor's signature	Date
		Ichiro Nakano	February 1, 1999
住所	Residence		
	Kawasaki-shi, Kanagawa, Japan		
国籍	Citizenship		
	Japan		
私書箱	Post Office Address		
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka		
	4-chome, Nakahara-ku, Kawasaki-shi,		
	Kanagawa, 211-8588 Japan		
第二共同発明者	Full name of second joint inventor, if any		
	Yasufumi NAKAMURA		
第二共同発明者	日付	Second inventor's signature	Date
		Yasufumi Nakamura	February 1, 1999
住所	Residence		
	Kawasaki-shi, Kanagawa, Japan		
国籍	Citizenship		
	Japan		
私書箱	Post Office Address		
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka		
	4-chome, Nakahara-ku, Kawasaki-shi,		
	Kanagawa, 211-8588 Japan		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)